



BLOCK LITE

Top Performance Tag for Library and Media Management Applications

SMARTRAC BLOCK LITE inlays and tags featuring NXP ICODE SLIX and SLIX2 ICs are designed for library and other media management applications. Block products provide best-in-class read range, optimal size and performance in a compact, square package.

BLOCK LITE with NXP ICODE SLIX provides 896 bits of user memory, while NXP ICODE SLIX2 boasts an extended user memory of 2,528 bits. The tag provides excellent performance in all printed media products and applications, including self-check with stack reading capability, and EAS. BLOCK LITE is delivered in paper-tag format and selected paper is resistant to aging (ISO 9706 compliant). Paper grade together with PH-neutral adhesive make it suitable for archiving applications. It is the ideal product to complement advanced media management systems and offers a lifetime library warranty.

SMARTRAC's inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management. This ensures a reliable and state-of-the-art product that meets a variety of application needs, where high performance is a critical parameter.

Overview

Operating Frequency

13.56 MHz

Integrated Circuit (IC)

NXP ICODE SLIX & SLIX2

Antenna & Die-cut Size

47 x 47 mm / 1.85 x 1.85"

50 x 50 mm / 1.97 x 1.97"

International Standards

- ▶ ISO 15693
- ▶ ISO 18000-3 Mode 1
- ▶ NFC Forum Type 5

Application Areas


- ▶ Media & Document Management

BLOCK LITE

Top Performance Tag for Library and Media Management Applications

Technical Features			
IC + Memory	Size	Format	Sales Code
NXP ICODE SLIX	50 x 50 mm / 1.97 x 1.97 in	wet	3001959
896 bit	50 x 50 mm / 1.97 x 1.97 in	Paper Tag face material: mid-gloss paper	3002138
NXP ICODE SLIX2	50 x 50 mm / 1.97 x 1.97 in	wet	3005878
2,528 bit		Paper Tag face material: mid-gloss paper	3002987
Operating Temperature	-40°C to 85°C / -40°F to 185°F		
Adhesive	Acrylic, water borne adhesive; usage temperature: min. -20°C to 80°C / min. -4°F to 176°F		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		

*Additional product configurations are available upon request.

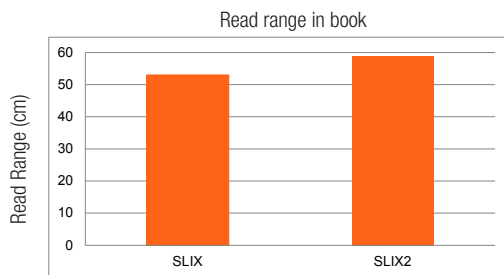

SMARTRAC TECHNOLOGY GROUP uses three different qualification methods to evaluate the quality and reliability of RFID inlay and tag products. Products are tested according to IEC 60068-2-67 (temperature and humidity), JEDEC22-A104-B (temperature cycling) and an in-house developed bending test. All the graphs are indicative; performance in real life applications may vary.

SMARTRAC N.V. · Strawinskyalaan 851 · 1077 XX Amsterdam · The Netherlands
 Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155 · info@smartrac-group.com

Contact: Sales & Customer Service
www.smartrac-group.com/contact

© 2017 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

